


35 - COLUMNS - C1 (CP-1,CP-2A,CP-2B,CP-2C,CP-3 & CP-4)




B-B

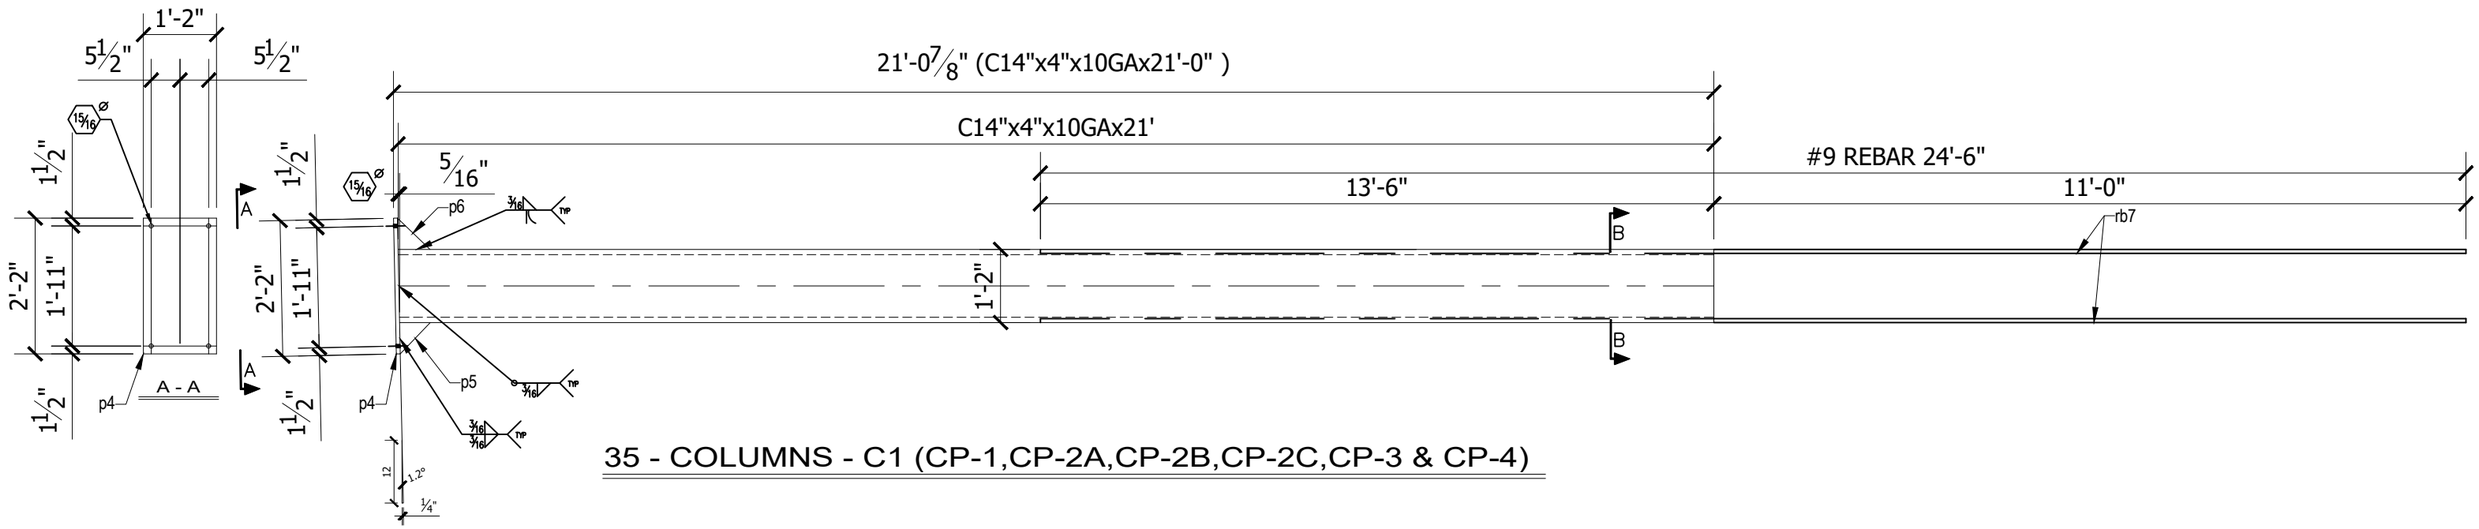


FRONT VIEW

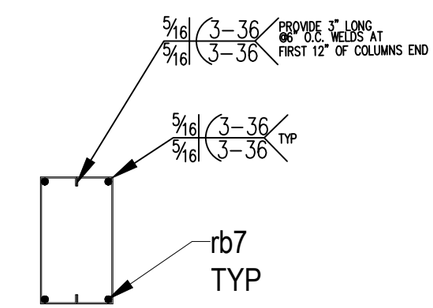


SIDE VIEW

## BILL OF MATERIAL
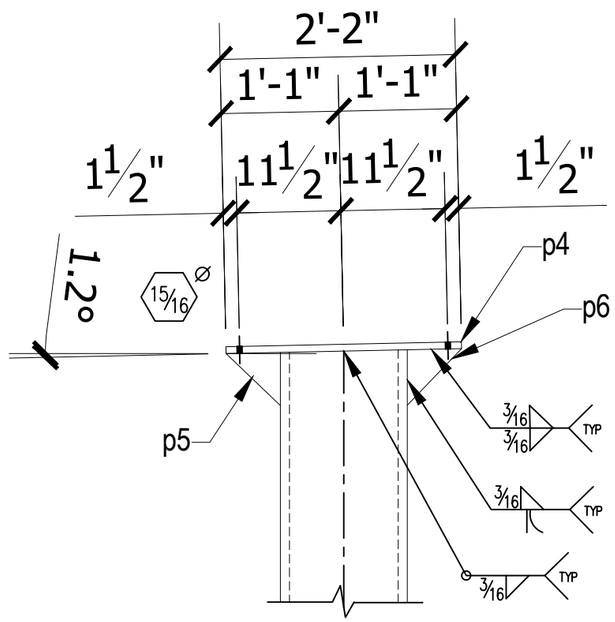
| SHIP MARK | PIECE MARK | QTY | DESCRIPTION | FT. | IN. | GR. | REMARKS | WT. |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | |
| C1 | | 35 | COLUMNS | | | | | |
| | C1 | 70 | CEE 14x4x10GA | 21 | 0 | | G90 (75 KSI) | 15642 |
| | p4 | 35 | PL 3/4 x 14 | 2 | 2 | | A572 | 2710 |
| | p5 | 70 | PL 3/8 x 6 | 0 | 6 | | A572 | 146 |
| | p6 | 70 | PL 3/8 x 6 | 0 | 6 | | A572 | 146 |
| | | | | | | | | |
| | | | | | | | | |
| | rb7 | 140 | #9 REBAR | 24 | 6 | 60 | A706 | 11662 |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | 30306 |

PROJECT SPECIFIC NOTES (UNO):
G90

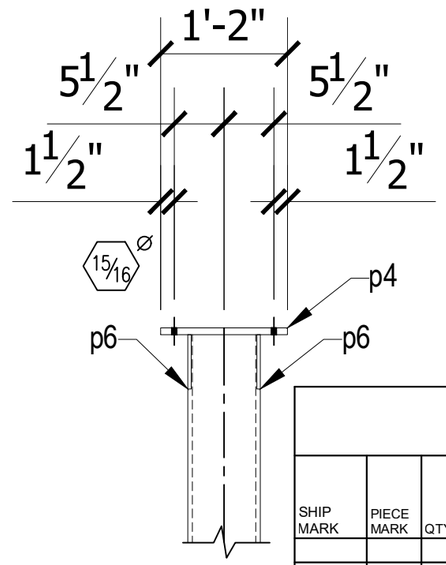MATERIAL : A36 UNO
PAINT: COLD GALV ALL PLAIN STEEL & WELDS
HOLES: 15/16"- UNO
DO NOT PAINT AT THE LOCATIONS INDICATED

| DATE | REV | REVISION/DESCRIPTION |
|---|---|---|
| | | |
| | | |
| | | |
| | | |
| | | |
| 7-18-22 | A | FOR FABRICATION |
| 6-22-22 | A | FOR APPROVAL |

DESIGN/REVIEW AUTHORITY:
PLEASE REVIEW THIS DRAWING CAREFULLY

We assume NO responsibility for the accuracy of the information in the contract documents including architectural and structural drawings.This drawing represents our best interpretation of the contract documents.Unless Noted Otherwise when it is returned from approval it will be assumed that the design authority confirms that we have correctly interpreted the contract documents,and we are released to begin fabrication using these drawings.

PROJECT: COTTINGHAM RV
4858 S SAM HOUSTON PKWY E PEARLAND, TX 77581

Skyline Steel Inc.
631 W COMMERCE AVE
GILBERT, AZ 85253
PHONE: 480-926-0122
FAX: 480-926-9178
www.skylinesteelincaz.com

CUSTOMER: TITAN SOLAR POWER NV.
DRAFTING SERVICE: SKYLINE STEEL INC
REV. NO 0
DATE: 6/21/2022
DRAWN: RC
CHECKED: ETC
JOB NO. SF21-464
DWG. NO C1